

MERCEDES G CLASS

REF: SMGL

YEAR: 1979 onwards

FITMENT SIDE: Left



SNORKEL MATERIAL

ExxonMobil EXXONMOBIL™
LLDPE LL 8446.21



Linear Low Density Polyethylene Resine

LL 8446 is a linear low density butene copolymer designed to offer excellent processability, whiteness, and fast grinding rate. This UV stabilized resin is ideally suited for applications that require excellent dimensional control and low warpage.

RESINE PROPERTIES

Additive

Long Term UV-8 Stabilizer

Density

0.936 g/cm³ (Based on ISO 1183)

Melt Index (190°/2.16 Kg)


5.0 g/10min (Based on ISO 1183)

PART	DESCRIPTION		QTY
1	Snorkel Head	89 mm / 3,5"	x1
2	Black clamp	80-100 mm	x1
3	Plastic Insert		x3
4	Bolt - Allen	8 x 10 mm	x2
5	Screw	4 x 15 mm	x3
6	Bracket Upper Mounting		x1
7	Snorkel Body		x1
8	Clamp	110-140 mm	x1
9	Bolt - Allen	6 x 15 mm	x4
10	Washer	6 x 12 mm	x4
11	Nut - Nyloc	6 x 10 mm	x4

PART	DESCRIPTION		QTY
12	Metal Plate		x1
13	Installation Template		x1
14	Bolt	8 x 35 mm	x4
15	Washer	8 x 15 mm	x4
16	Nut - Nyloc	8 x 13 mm	x4
17	Bolt	8 x 25 mm	x4
18	Washer	8 x 30 mm	x4
19	Duct Connecting		x1
20	Clamp	80-100 mm	x3
21	Metal Pipe	90 x 60 mm	x1
22	Flexible Hose	350 x 1000 mm	x1

OPTION A

Installation with original air intake opening in fender.

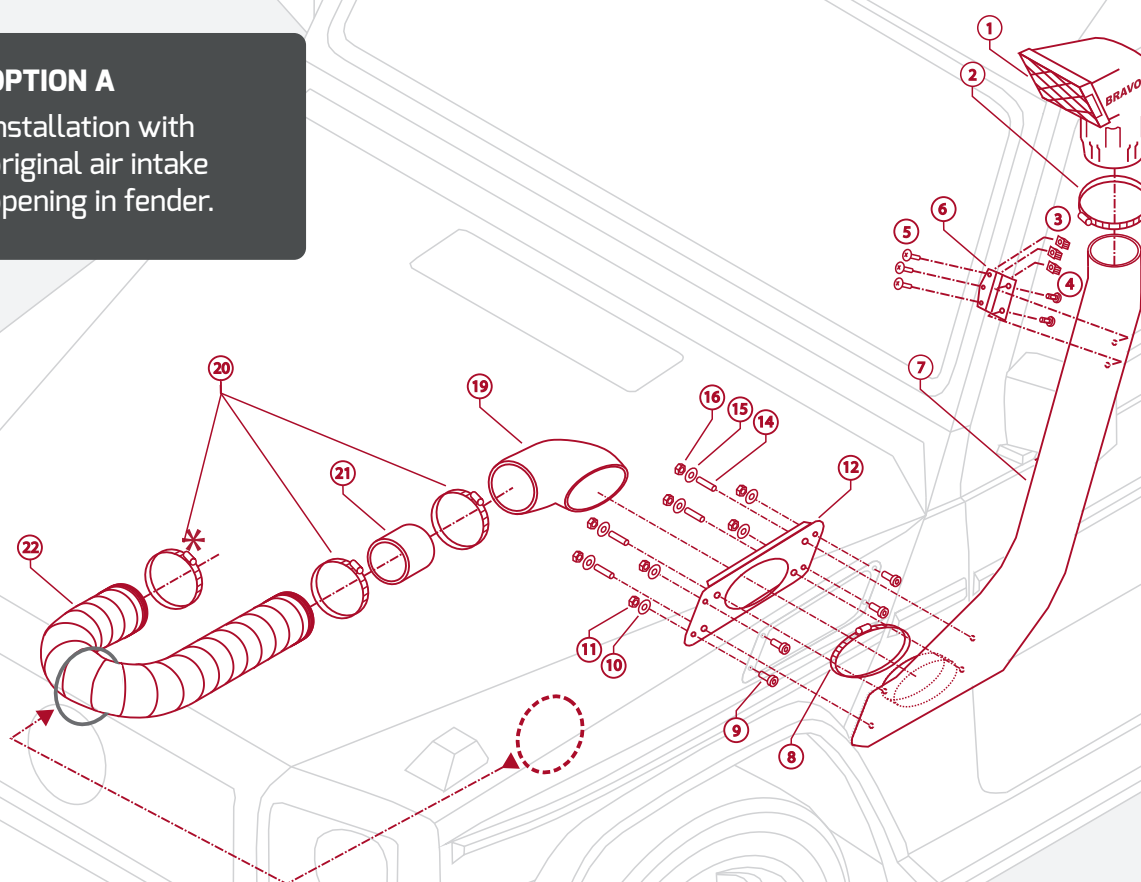

OPTION B

Installation without original air intake opening in fender.

